

SonoLong SoftSecure

Intuitive Method of Catheter Placement for Peripheral Nerve Blocks





Clinical Requirements

Precision in Catheter Placement


Precise and permanent placement of the catheter is of crucial importance for reliable performance of peripheral nerve blocks. Marhofer et al. have analyzed the causes and consequences of catheter misplacement in detail. Among other things, they found a highly significant correlation between the dwell time and the dislocation rate of the catheter for interscalene and femoral nerves.


Primary dislocation

If the catheter is pushed further through the nerve, the anesthetic not only misses its target area, but serious complications such as injury to nerve structures and blood vessels can also occur.

Secondary dislocation

Early mobilization of patients also carries the risk of catheter migration. This can damage vessels or nerves and the efficacy of the regional anesthetic cannot be safely guaranteed.

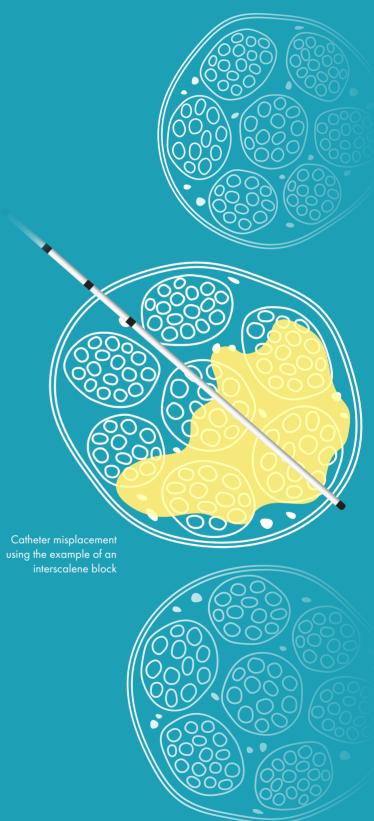

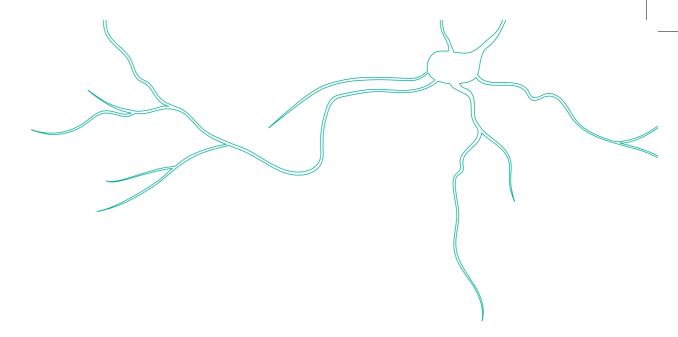

Relevance of the catheter material

An important starting point for reducing the dislocation rate is the quality of the catheter tip. In 2012, Shih et al. found a direct correlation between the stiffness of the catheter material and the dislocation rate during epidural block.²


This is exactly where the PAJUNK® development started off from. The result is the SonoLong SoftSecure catheter which is characterized by a soft catheter material and is equipped with a stylet, a stainless steel spiral, and three lateral openings.

The soft tip of the SonoLong SoftSecure catheter ensures precise placement, as the tip is deflected away from the nerve wall due to the wall's resistance.

For the same reason, the catheter is also held back by the surrounding, firmer structures of the fascia and rolls up in the immediate vicinity. Further advancement of the catheter and subsequent dislocation during patient mobilization should be avoided.

"With this combination of atraumatic, flexible catheter material, and a stable architecture, Pajunk has established a new generation of catheters that virtually eliminate dislocation."

Frederik Lehn, Head of Development at Pajunk

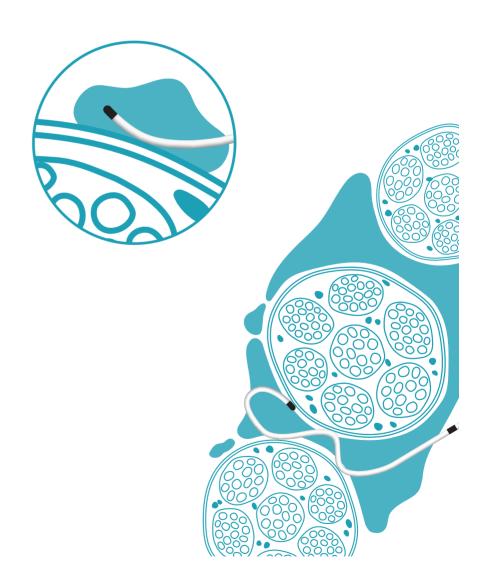

SonoLong SoftSecure Catheter

Soft Tip - Solid Core

Atraumatic Catheter Placement

Soft Catheter Material


Makes the tip soft and flexible:

Designed to minimize the primary and secondary dislocation rates.

Stylet Ensures Stability

Stylet is set back 5 cm from the distal end:

- Supports convenient and secure placement.
- The soft catheter tip maintains its atraumatic properties.

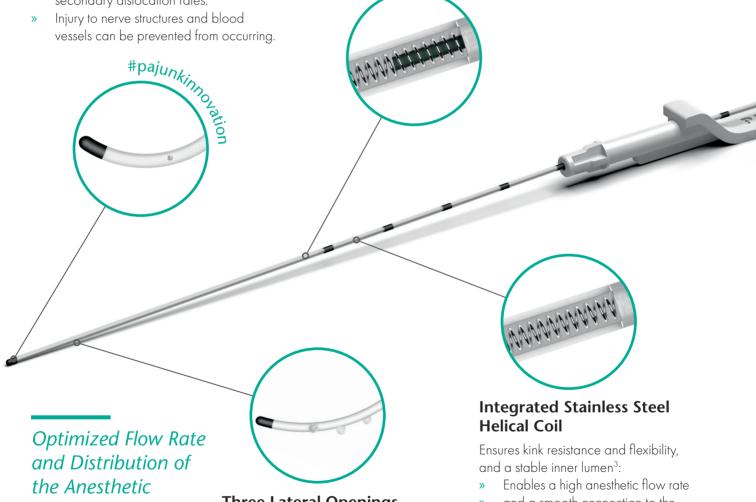


Three Lateral Openings

Arranged around the first 1.1 cm, the tip is closed:

Optimize even distribution of the anesthetic.

and a smooth connection to the injection pump.

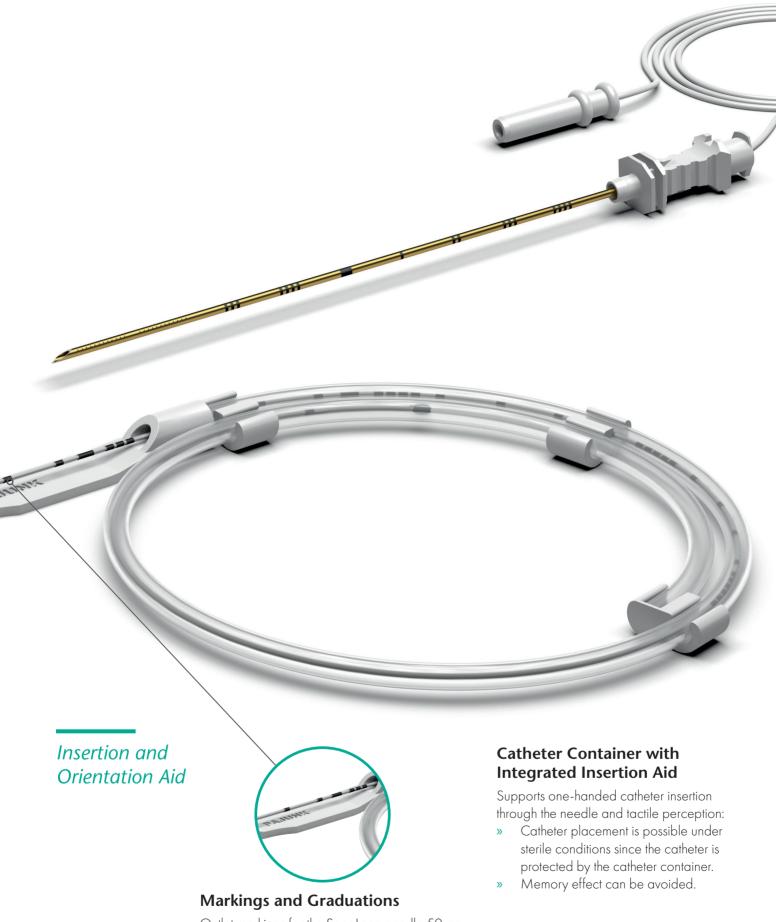

Outlet markings for the SonoLong needle 50 mm, 100 mm, 150 mm and six ascending 360° markings in 5-cm increments up to 30 cm:

- » Indicate where the catheter tip exits the needle.
- » Support easy control of catheter position.

SonoLong NanoLine® Needle

Gold Standard for CTN Technique

Optimized Ultrasound Visibility and Stimulation

NanoLine Coating


Ultra-thin polymer layer in the inner and outer lumen:

» Increased stimulation precision only through the non-insulated needle tip.

Cornerstone Reflectors

 360° graduations on the first $20 \, \text{mm}$ of the needle in two sections:

- » Optimized ultrasound visibility of the needle shaft⁴.
- » Reliable and optimized needle echogenicity at higher insertion angles.

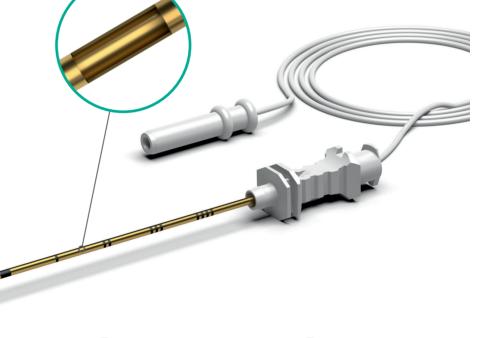

Comparison of Ultrasound Visibility* with Cornerstone and NanoLine Technology

*The following PAJUNK® products have been compared at an insertion angle of 50° using Blue Phantom: SonoPlex 22G with Cornerstone and NanoLine technology and Chiba 22G.



With Cornerstone and NanoLine Technology



Without Cornerstone and NanoLine Technology


SonoLong NanoLine Needles with Alternative Tip Geometries





Tuohy Tip

Facet Tip S

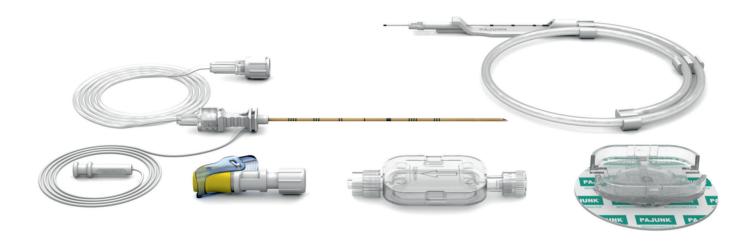


SonoLong SoftSecure

| SonoLong SoftSecure With facet tip S | Needle size | Catheter size Closed tip and 3 lateral openings | Item no. | NRFit® item no. | PU | FixoLong + filter | Clamping adapter |
|---|-------------------|---|-------------|-----------------|----|----------------------|---------------------|
| | 19G x 50 mm (2") | 20G x 50 cm (20") | 531189-31 A | 531169-31A | 10 | • | • |
| | 19G x 100 mm (4") | 20G x 50 cm (20") | 521189-31 A | 521169-31A | 10 | • | • |
| | 19G x 150 mm (6") | 20G x 50 cm (20") | 511189-31 A | 511169-31A | 10 | • | • |

| SonoLong SoftSecure With Tuohy tip | Needle size | Catheter size Closed tip and 3 lateral openings | Item no. | NRFit item no. | PU | FixoLong + filter | Clamping adapter |
|---------------------------------------|-------------------|---|------------|----------------|----|----------------------|---------------------|
| | 18G x 50 mm (2") | 20G x 50 cm (20") | 531189-31C | 531169-31C | 10 | • | • |
| | 18G x 100 mm (4") | 20G x 50 cm (20") | 521189-31C | 521169-31C | 10 | • | • |



Also available in NRFit®







More information on SonoLong SoftSecure

Not all devices are registered and approved for sale in all countries or regions. Even the instructions for use may differ depending on the country or region. Please contact our representative in your country to get information on the availability of the devices.

PAJUNK® GmbH Medizintechnologie International Sales

Karl-Hall-Straße 1 78187 Geisingen, Germany Tel.: +49 7704 9291-0 Fax: +49 7704 9291-600 info@pajunk.com pajunk.com PAJUNK® Medical Produkte GmbH Central Europe

Pajunkstraße 2 78187 Geisingen, Germany Tel.: +49 7704 8008-0 Fax: +49 7704 8008-150 info@pajunk-medipro.com pajunk.de&pajunk.eu PAJUNK® Swiss AG Switzerland

Neuhofstrasse 5A 6340 Baar, Switzerland Tel.: +41 417 609 627

info@pajunk.ch pajunk.ch PAJUNK® Medical System L.P. United States of America

4575 Marconi Drive Alpharetta, GA 30005, USA Tel.: +1 888 972 5865 Fax: +1 678 514 3388 info@pajunk-usa.com pajunkusa.com PAJUNK® UK Medical Products Ltd United Kingdom

Unit D1 The Waterfront Goldcrest Way, Newburn Riverside Newcastle upon Tyne, NE15 8 NY, UK Tel.: +44 191 264 7333 info@pajunk.co.uk pajunk.co.uk